

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 :

B22F 3/00, C22C 33/02

A1

(11) International Publication Number:

WO 97/47418

(43) International Publication Date:

18 December 1997 (18.12.97)

(21) International Application Number:

PCT/SE97/01027

(22) International Filing Date:

12 June 1997 (12.06.97)

(30) Priority Data:

9602376-7

14 June 1996 (14.06.96)

SE

(71) Applicant (for all designated States except US): HÖGANÄS
AB [SE/SE]; S-263 83 Höganäs (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): MÁRS, Owe [SE/SE];
Strandrågsvägen 9, S-260 40 Viken (SE). CARLBAUM,
Nils [SE/SE]; Allerum 805, S-260 35 Ödåkra (SE).(74) Agent: AWAPATENT AB; P.O. Box 5117, S-200 71 Malmö
(SE).(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR,
BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE,
GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ,
PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT,
UA, UG, US, UZ, VN, YU, ARIPO patent (GH, KE, LS,
MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY,
KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH,
DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT,
SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML,
MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: POWDER METALLURGICAL BODY WITH COMPACTED SURFACE

(57) Abstract

The present invention concerns compacted and optionally presintered bodies, which are prepared from metal powders and which have densified surfaces, obtained by shot peening or rolling.

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

POWDER METALLURGICAL BODY WITH COMPACTED SURFACE

The present invention concerns compacted bodies and more particularly compacted and optionally presintered bodies, which are prepared from metal powders and which have a densified surface.

5 Materials used for components subjected to a bending stress e.g. gear wheels are subjected to local stress concentrations, and it is preferred that these materials have superior properties at the local stress maximum regions.

10 An example of such a material is disclosed in EP 552 272 which concerns sintered powder metal blanks having densified surface regions. According to this publication the densified regions are obtained by rolling.

15 It is also known that the surfaces of sintered powder metallurgical parts can be densified by using shot peening. The purpose of shot peening the surfaces of these sintered parts is to induce compressive stress in the surfaces, which in turn results in sintered parts having improved fatigue strength, surface hardness etc.

20 It has now been found that important advantages can be obtained if the densification of the surface is performed before the sintering of the compacted parts. The most interesting results have been obtained when the compacted parts are subjected to the densification process after a presintering step. Accordingly, the present invention concerns a process for preparing compacted and preferably presintered bodies having a densified surface as well as the bodies obtained by this process.

25 By performing the densification of metal powder bodies in green and optionally presintered condition, a larger degree of deformation can be obtained than in the case where sintered bodies are densified. When the green and optionally presintered parts are subsequently sintered, the previous pores are sintered together and a layer with full or almost full density is created. In
35 this context the term "full or almost full density" is

intended to mean that a densification in the range of 90 - 100 per cent of full density is established.

By using the process according to the present invention not only the densification or deformation depth will be improved: Also the energy requirement will be considerably lower than when the densification process is carried out after the sintering step in accordance with known methods. After sintering the bodies prepared according to the present invention can be treated with secondary operations as usual.

Suitable metal powders which can be used as starting materials for the compacting process are powders prepared from metals such as iron and nickel. In the case of iron-based powders, alloying elements, such as carbon, chromium, manganese, molybdenum, copper, nickel, phosphorus, sulphur, etc. can be added in order to modify the properties of the final sintered products. The iron-based powders can be selected from the group consisting of substantially pure iron particles, pre-alloyed iron-based particles, diffusion-alloyed iron-based particles and mixtures of iron particles and alloying elements.

In order to obtain sufficient bending strength for the subsequent densification process the starting metal powder is uniaxially compacted at a pressure between 200 and 1200, preferably between 400 and 900 MPa. The compaction is preferably carried out in a lubricated die. Other types of compaction are warm and cold compaction of metal powders mixed with lubricants, such as stearates, waxes, metal soaps, polymers, etc.

According to a preferred embodiment of the invention the compacted body is also presintered at a temperature above 500°C, preferably between 650 and 1000°C before the densification operation.

The green and optionally presintered bodies subjected to the densification process according to the present invention should be compacted and optionally presintered to a minimum bending strength of at least 15

MPa, preferably at least 20 MPa, and most preferably at least 25 MPa.

The densification process according to the invention is preferably carried out by shot peening although other densification processes such as different types of rolling are not excluded. In shot peening, rounded or essentially spherical particles (termed "shot") made from cast or wrought steel and stainless steel, as well as from ceramic or glass beads, are propelled against a workpiece with sufficient energy and for a sufficient time to cover the surface with overlapping cold worked dimples (see e.g. the article by J. Mogul et al "Process controls the key to reliability of shot peening", Process Controls & Instrumentation, November 1995).

The shot peening time according to the present invention normally exceeds 0.5 seconds and is preferably between 1 and 5 seconds and the Almen intensity is normally in the range 0.05 - 0.5. The deformation depth depends on the final use of the product and should exceed 0.1 mm, preferably 0.2 mm and most preferably the depth should exceed 0.3 mm.

The invention is illustrated by the following non-limiting examples.

The starting metal powder was Distaloy DC-1, which is an iron-based powder containing 2% nickel and 1.5% molybdenum available from Höganäs AB, Sweden.

This powder was warm compacted at 700 MPa to a density of 7.4 g/cm³ having a bending strength of 25 MPa. The compacted bodies were divided into the following three groups:

- Group 1 The bodies were left green, i.e. not subjected to any additional treatment.
- Group 2 The bodies were presintered at 750°C for 20 minutes in protective atmosphere.
- Group 3 The bodies were sintered at 1120°C for 15 minutes in endogas.

Group 1

The green bodies were shot peened. At too high intensities, i.e. Almen intensities (cf the Mogul article referred to above) above 0.14 for 3 seconds, the particles were torn loose and the surface was destroyed. It turned out that the Almen intensities should be below about 0.14 and the exposure time should be less than 2 seconds. This was true for both green bodies which had been warm compacted and for bodies which were produced in a lubricated die. As can be seen in Fig. 1, the densification was somewhat better in the bodies obtained when the compaction was performed in a lubricated die.

Group 2

The presintering of the green bodies was done in order to remove lubricant that could create porosity, to remove deformation hardening and to improve the strength of the material. It was essential that the graphite diffusion was limited in order to avoid solution hardening effects in the iron powder particles. After the presintering, the strength of the material had improved significantly and much higher Almen intensities could be used, especially for the bodies manufactured in lubricated dies. Almen intensities up to 0.3 could be used without problems, i.e. no particles were torn loose from the surface, and deformation depths of 300 μm were achieved. For the warm compacted bodies the erosion started at intensities of 0.14. Due to the removal of lubricant and deformation hardening, the deformation depth had increased significantly in comparison with the green bodies of group 1.

Group 3

Only warm pressed materials were tested as no significant pore structure difference from various compacting methods is considered to remain after a full sintering operation. The sintered body had their full strength, and therefore very high Almen intensities, up to 0.3, could be used. The effect of the shot peening operation is, however, much less in comparison with the bodies which were shot peened in green or presintered condition according to the present invention. It can be seen that only one third of the deformation depth was achieved at the same intensity due to the high hardness of the presintered body.

The experiments are listed in the following table.

Compaction	Sintering	Shot Peening Time/ Almen Intensity	Deformation depth	Picture number
Lubricated Die	Green	1.5 s/0.08	50 μm	
Lubricated Die	Green	1.5 s/0.13	100 μm	960686
Warm Compacted	Green	1.5 s/0.08	30 μm	960685
Warm Compacted	Green	1.5 s/0.13	30-50 μm	
Lubricated Die	Presintered	3 s/0.17	200 μm	
Lubricated Die	Presintered	3 s/0.21	250 μm	960644
Lubricated Die	Presintered	3 s/0.30	300 μm	960642
Warm Compacted	Presintered	1.5 s/0.13	200 μm	
Warm Compacted	Presintered	1.5 s/0.14	200 μm	960640
Warm Compacted	Sintered	3 s /0.17	70 μm	
Warm Compacted	Sintered	3 s/0.21	100 μm	
Warm Compacted	Sintered	3 s/0.30	130 μm	960645

CLAIMS

1. Process for the preparation of a powder metallurgical body characterised by the steps of
 - 5 - uniaxially compacting metal powder;
 - subjecting the obtained body to shot peening or rolling at an intensity and for a period of time sufficient for establishing a densification surface layer in the range of 90 to 100 per cent of full density within a deformation depth of at least 0.1 mm, preferably at least 0.2 mm and
 - 10 - optionally subjecting the obtained body to an additional compacting step.
- 15 2. Process according to claim 1, characterised in that the compacted body is presintered at a temperature of at least 500°C before shot peening or rolling.
- 20 3. Process according to claim 2, characterised in that the metal powder is an iron-based powder.
- 25 4. Process according to claim 3, characterised in that the iron-based powder includes one or more elements selected from the group consisting of C, Cr, Mn, Mo, Cu, Ni, P, V, S, B, Nb, Ta, N and inevitable impurities in addition to Fe.
- 30 5. Process according to claim 4, characterised in that the iron-based powder is selected from the group consisting of substantially pure iron particles, pre-alloyed iron-based particles, diffusion alloyed iron-based particles and mixtures of iron particles and
- 35 alloying elements.

6. Process according to any one of the preceding claims, characterised in that the powder is uniaxially compacted and optionally presintered to a bending strength of at least 15 MPa, preferably at least 20 MPa and most preferably at least 25 MPa.

7. A uniaxially compacted and optionally presintered body of metal powder having a densification surface layer in the range of 90 to 100 per cent of full density within a deformation depth of at least 0.1 mm.


8. A body according to claim 7, having a deformation depth of at least 0.2 mm.

9. A body according to claim 7 or 8, which has been subjected to an additional compacting step after the shot peening or rolling step.

10. A body according to any one of the claims 7-9, characterised in that the metal powder is an iron-based powder.

1/3


Compacted at 700 MPa lubricated die Shot peened green, Intensity 0,13 1,5 s

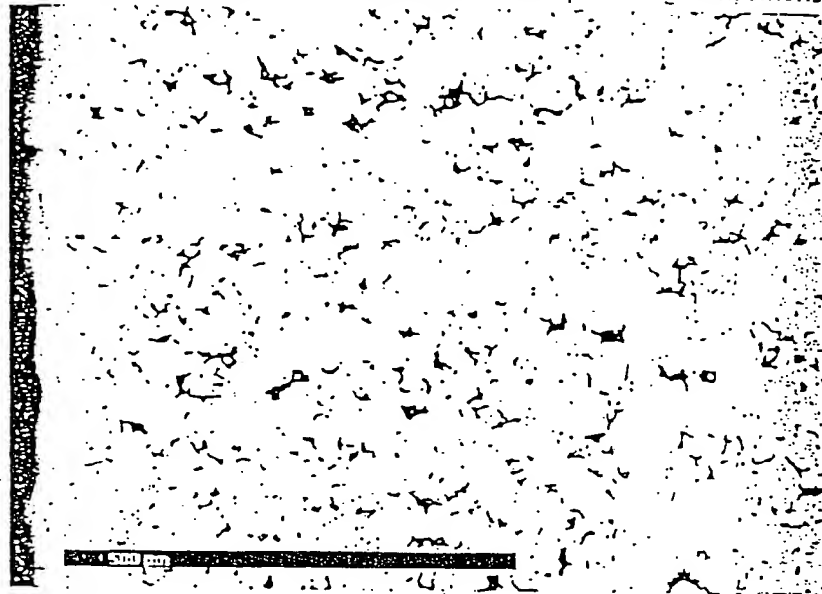

960686

Unetched 120X

Warm compacted at 700 MPa Shot peened presintered, Intensity 0,14 1,5 s

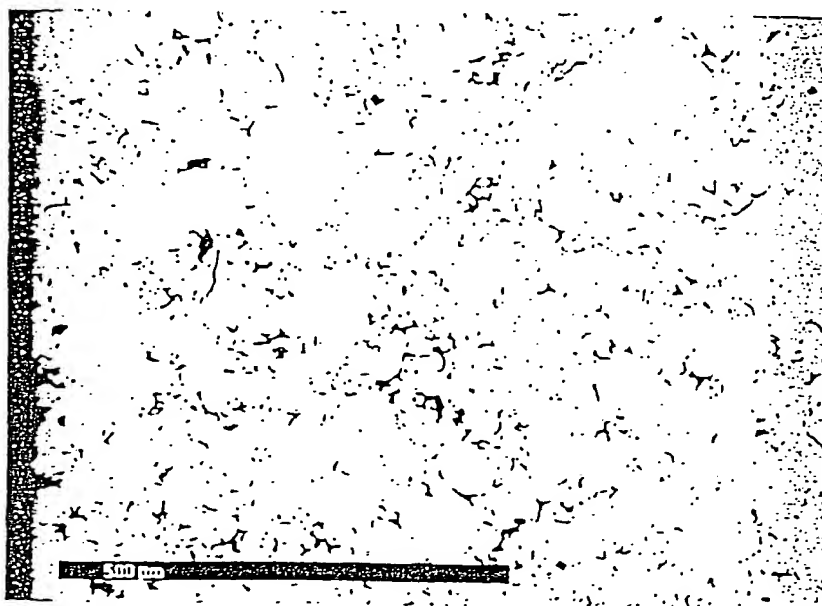


960640

Unetched 120X

2/3


Compacted at 700 MPa lubricated die Shot peened presintered, Intensity 0,21 3 s

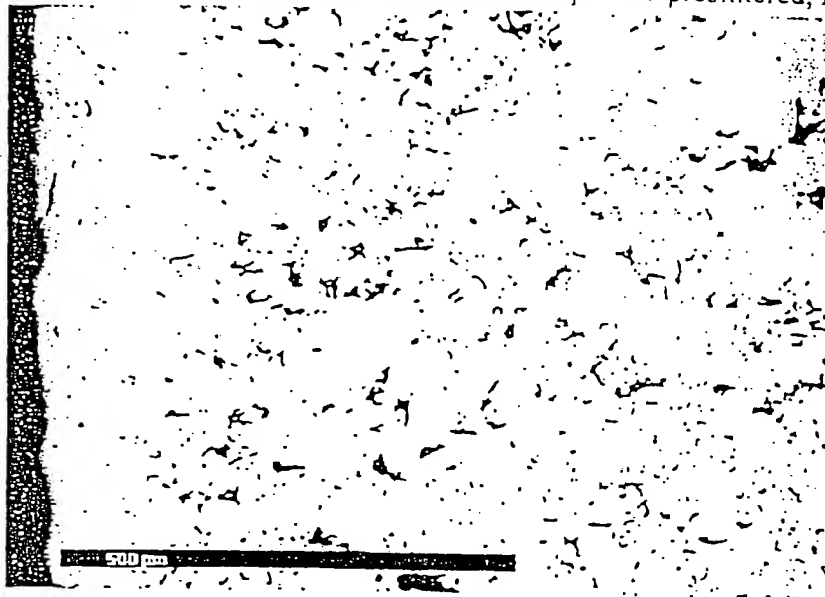

960644

Unetched 120X

Compacted at 700 MPa lubricated die Shot peened presintered, Intensity 0,3 3 s

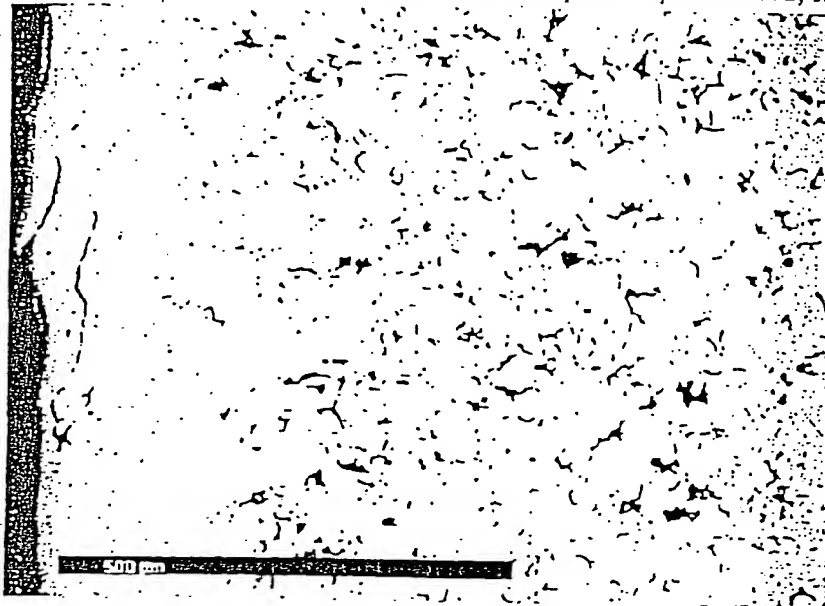


960642

Unetched 120X

3/3


Warm compacted at 700 MPa Shot peened green, Intensity 0,08 1,5 s

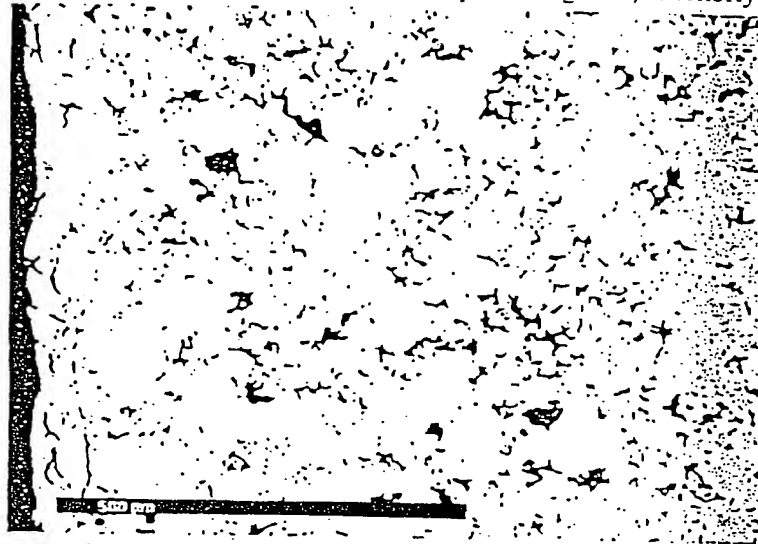

960685

Unetched 120X

Warm compacted 700 MPa Shot peened sintered 1120°C Intensity 0,3, 3 s

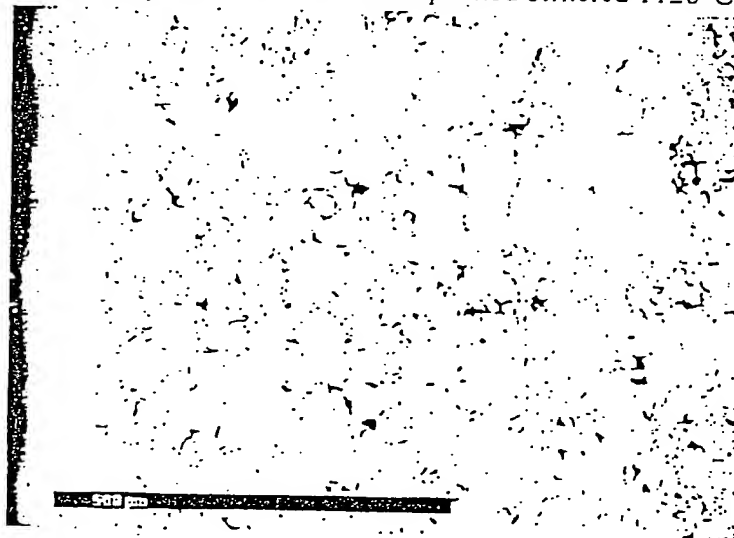

960645

Unetched 120X

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 97/01027

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: B22F 3/00, C22C 33/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: B22F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	Dialog Information Services, File 347, Japio database; Accession number 02047302; TOYOTA MOTOR CORP: "Simple chamfering method for sintered member"; JP,A,61-261402, 8611-19	1,3,4,5,7,9, 10
A	--	2,6,8
A	WO 9414557 A1 (STACKPOLE LIMITED), 7 July 1994 (07.07.94), page 1, line 1 - line 9; page 12, line 15 - page 16, line 24	1-10
A	WO 9205897 A1 (FORMFLO LIMITED), 16 April 1992 (16.04.92), page 1, line 1 - page 4, line 9	1-10

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 Sept 1997

Date of mailing of the international search report

02.10.97

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Nils Engnell

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 97/01027

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	INDUSTRIAL HEATING, no. 11, November 1995, Mogul J et al, "Process Controls the Key to Reliability of Shot Peening" page 34 - page 36 -----	1-10

INTERNATIONAL SEARCH REPORT
Information on patent family members

01/09/97

International application No.
PCT/SE 97/01027

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9414557 A1	07/07/94	AU 3154893 A CA 2104606 A EP 0626893 A JP 7505679 T US 5540883 A	19/07/94 22/06/94 07/12/94 22/06/95 30/07/96
WO 9205897 A1	16/04/92	AU 8669391 A CA 2070180 A DE 69105749 D,T EP 0552272 A,B SE 0552272 T3 ES 2065711 T GB 2250227 A,B JP 6501988 T	28/04/92 09/04/92 24/05/95 28/07/93 16/02/95 03/06/92 03/03/94

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☒ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.